



DC CURRENT SHUNT

BST



FEATURES

- Accuracy: $\pm 0.5\%$ F.S.
- Measuring range: 20, 30, 50, 100, 150, 250, 300, 600 Adc...
- Output signal: 50 mVdc or 60 mVdc
- Standard and custom options available for OEM design





DIMENSION

- 1A ~ 125A

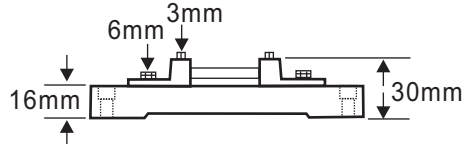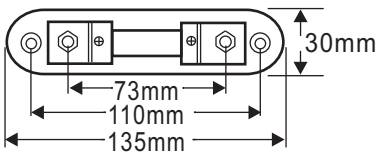



Type	Weight
1A~125A	140 g

- 150A ~ 200A

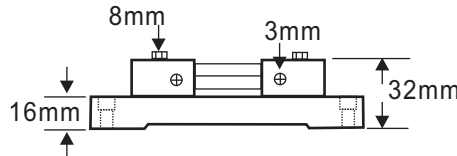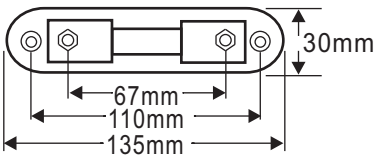



Type	Weight
140A~200A	190 g

- 250A ~ 600A





Type	L1	L2	W	H	Weight
250 A	115	84	41	12.0	390 g
300 A	115	84	35	18.5	395 g
400 A	115	84	44	18.5	510 g
500 A	115	84	55	18.5	650 g
600 A	121	89	55	21.5	800 g

- 800A ~ 1500A

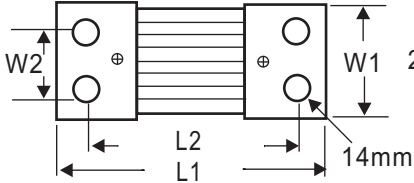



Type	L1	L2	W1	W2	Weight
800 A	121	89	70	35	0.99 kg
1000 A	160	121	70	35	1.45 kg
1200 A	162	123	85	45	1.8 kg
1500 A	161	122	100	49	2.2 kg

- 2000A ~ 2500A

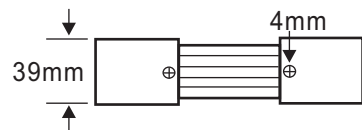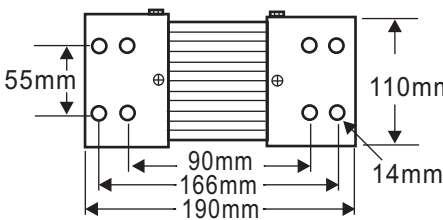

Type	Weight
2000A	4.7 kg
2500A	5.3 kg

- 3000A ~ 6000A

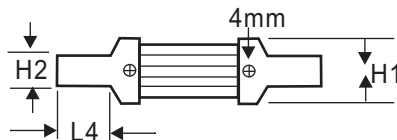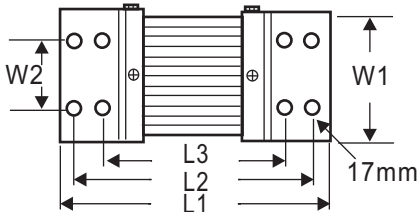

Type	L1	L2	L3	L4	W1	W2	H1	H2	Weight
3000 A	273	232	142	90	103	55	64	28	7 kg
4000 A	292	253	153	97	110	55	82	34	9.5 kg
5000 A	315	271	163	100	128	60	106	41	15 kg
6000 A	327	283	175	108	133	65	115	48	19.2 kg

ORDER INFORMATION: BST-□/□

- | | | |
|-----------|-----------|-----------------|
| ◆ Current | ◆ Current | ◆ Output Signal |
| 5: 5A | 250: 250A | 50: 50 mVdc |
| 30: 30A | 300: 300A | 60: 60 mVdc |
| 50: 50A | 400: 400A | |
| 100: 100A | O: Others | |
| 200: 200A | | |